

ROAD FIT FORM



KEVIN WOLFSON
LEAD FRAME DESIGNER

617.825.3473
KEVIN@FIREFLYBICYCLES.COM

FIREFLY BICYCLES
117 BOSTON ST
DORCHESTER, MA
02125

FIREFLYBICYCLES.COM

CONTACT INFORMATION AND FRAME SPECIFICATIONS

Name

Shipping Address

Primary Phone Number

Email

MATERIAL

- Titanium // \$4400 Ti-Carbon // \$6900

FORK CHOICE

- Enve Rim Brake Road
- Enve Disc Road (included with Ti-Carbon) // \$100
- Other

WHEEL INFO

- 650c 700c
- Max tire size for new bike

SHIFTING

- Mechanical eTap Internal Di2 // \$200 Internal EPS // \$200

BRAKES

- Caliper Long-reach caliper (for frames with fenders and/or >28c tires)
- Disc (included with Ti-Carbon) // \$200

BOTTLE CAGES

- 0 1 2 3

EXTRA FRAME OPTIONS

- T47 Threaded BB (included with Ti-Carbon) // \$75 Internal brake routing (only available with Ti) // \$350
- Pressfit30 BB (included with Ti-Carbon) // \$75
- Straight oversized head tube for tapered forks (included with Ti-Carbon) // \$200
- Tapered oversized head tube for tapered forks (\$100 with Ti-Carbon) // \$300
- Rack mounts Fender mounts
- Pump peg Oversized 1" chainstays (included with Ti-Carbon) // \$100
- Ti S&S couplers // \$1000 Proprietary tapered carbon integrated seatpost // \$800
- Bosch Performance Line pedal assist motor:

Complete builds starting at \$9200 (only available on full ti frames sold within the US)

FINISH

- Bead-blasted Brushed // \$300 Custom

LOGOS

- Decals Brushed/blasted Anodized // \$200

Contact us or [visit our finish options page](#) for more details about finish options.

PARTS KIT

We offer a full range of parts kits and components to complete your dream bike.

Email kevin@fireflybicycles.com for more details.

CURRENT BIKE INFO

Please take all measurements in cm

MAKE

MODEL

YEAR

THE FOUR KEY CONTACT POINTS

A: SADDLE HEIGHT

Measure from the center of the bottom bracket to the top-center of the saddle.

B: SADDLE SETBACK

This is best measured with a plumb bob (any long string with a weight on it will do).

Place the string on the tip of the saddle and drop the weight below the bottom bracket.

After it steadies, measure horizontally from the string to the center of the bottom bracket.

C: REACH

Measure from the tip of the saddle to the top-center of the bars.

D: HANDLEBAR DROP

Measure vertically from the top of the saddle to the ground.

Then measure vertically from the top-center of the bars to the ground.


Subtract the second measurement from the first.

OTHER BIKE SPECS

Horizontal TT length

Stem length and angle

Headset Spacers (in mm)

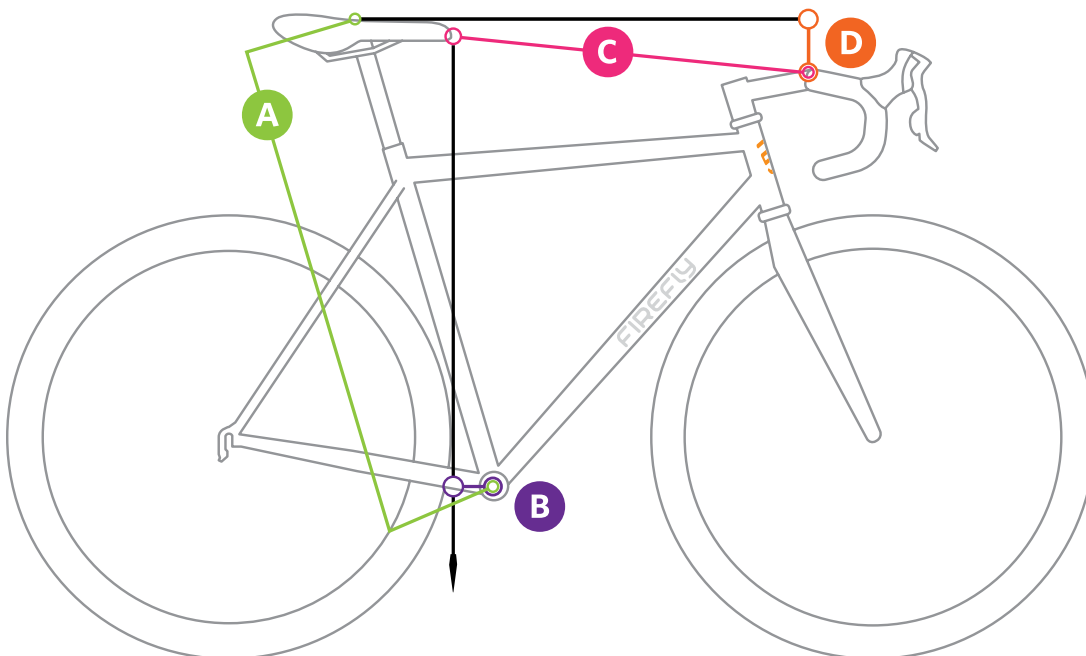

BODY INFO

Please take all measurements in cm. (Image courtesy of BikeCAD)

WEIGHT

AGE

A: HEIGHT

B: TOTAL BODY LENGTH

Your sternal notch is the notch at the base of your neck. Stand up straight with your feet at shoulder width. Measure from your sternal notch to the floor.

C: INSEAM

Still standing with your feet shoulder width apart, hold a book between your legs and parallel to the ground. Pull the spine of the book up into your perineum with the pressure of a saddle. Measure from book's spine to the ground.

Check this measurement a couple of extra times, it is the most difficult to take accurately.

D: ARM LENGTH

Your acromion process is the outermost bone in your shoulder. Hold onto a pen and hold your arm as straight as possible at a 45° angle. Measure from the acromion process to the pen.

E: SHOULDER WIDTH

Measure from one acromion process to the other.

