



# FIREFLY<sup>™</sup>

## BICYCLES

KEVIN WOLFSON | LEAD FRAME DESIGNER

423 Pleasant St, Melrose, MA 02176 | 617-825-3473

Send completed form to [kevin@fireflybicycles.com](mailto:kevin@fireflybicycles.com)

ATB FIT FORM

### CONTACT INFORMATION & FRAME SPECIFICATIONS

Name

Shipping Address

Primary Phone Number

Email

### MATERIAL

Titanium // \$5900

### FORK

Whisky No. 9 MCX      Firefly ATB // \$1930

### WHEEL INFO

29"      27.5"

### SHIFTING

1x Mechanical      2x Mechanical      Wireless      Internal Di2 // \$200

### BRAKES

Hydraulic Disc      Cable Disc

### BOTTLE CAGES

0      1      2      3

### EXTRA FRAME OPTIONS

*Contact us or visit our [Technology page](#) for more details about our frame options*

Pressfit30 or T47 BB // \$75

Internal brake routing // \$350

Tapered head tube // \$100

Bosch Performance Line pedal assist motor mount // \$800

Rack mounts

*Complete builds starting at \$9200 (only available on full ti frames sold within the US)*

Ti travel couplers // \$1300

Integrated light wiring // \$200

Internal dropper post routing // \$250

Fender mounts

Custom frame bag mounts // \$100

### FINISH OPTIONS

Bead-Blasted      Brushed // \$300      Custom

### LOGOS

Decals      Brushed/Blasted      Anodized // \$200

Contact us or visit our [Finish Options page](#) for more details about finish options.

### PARTS KIT

We offer a full range of parts kits and components to complete your dream bike.

Email [kevin@fireflybicycles.com](mailto:kevin@fireflybicycles.com) for more details.



## CURRENT BIKE INFO

MAKE

MODEL

YEAR

## THE FOUR KEY CONTACT POINTS

*Please take all measurements in cm*

### A. SADDLE HEIGHT

Measure from the center of the bottom bracket to the top-center of the saddle.

### B. SADDLE SETBACK

This is best measured with a plumb bob (any long string with a weight on it will do).  
Place the string on the tip of the saddle and drop the weight below the bottom bracket.  
After it steadies, measure horizontally from the string to the center of the bottom bracket.

### C. REACH

Measure from the tip of the saddle to the top-center of the bars.

### D. HANDLEBAR DROP

Measure vertically from the top of the saddle to the ground.  
Then measure vertically from the top-center of the bars to the ground.  
Subtract the second measurement from the first.


## OTHER BIKE SPECS

Horizontal TT Length

Stem Length & Angle

Headset Spacers (*in mm*)

Saddle Choice

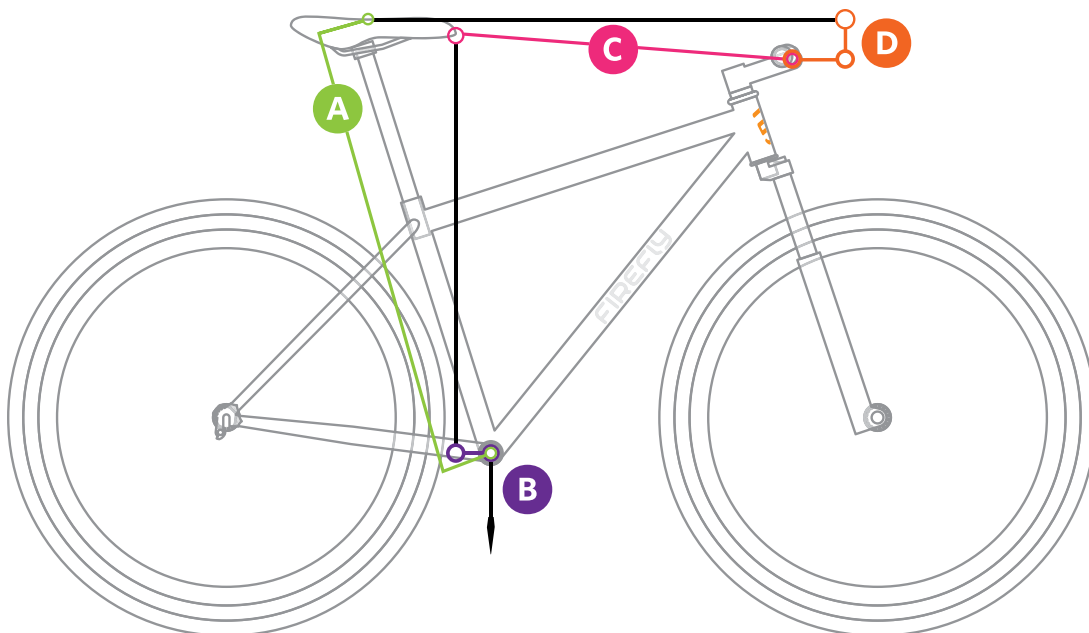



## BODY INFO

WEIGHT

AGE

*Please take all measurements in cm*

### A. HEIGHT

### B. TOTAL BODY LENGTH

Your sternal notch is the notch at the base of your neck. Stand up straight with your feet at shoulder width. Measure from your sternal notch to the floor.

### C. INSEAM

Still standing with your feet shoulder width apart, hold a book between your legs and parallel to the ground. Pull the spine of the book up into your perineum with the pressure of a saddle. Measure from book's spine to the ground. Check this measurement a couple of extra times, it is the most difficult to take accurately.

### D. ARM LENGTH

Your acromion process is the outermost bone in your shoulder. Hold onto a pen and hold your arm as straight as possible at a 45° angle. Measure from the acromion process to the pen.

### E. SHOULDER WIDTH

Measure from one acromion process to the other.

