



CONTACT INFORMATION & FRAME SPECIFICATIONS

Name

Shipping Address

Primary Phone Number

Email

MATERIAL

Titanium // \$4700

FORK CHOICE

ENVE Adventure // \$625

Custom Steel // \$1200

Firefly All-Road // \$2300

Other

WHEEL INFO

Max tire size for new bike

SHIFTING

Mechanical

Internal Di2 // \$200

Wireless

Rohloff // \$100

Single speed

BRAKES

Disc // \$200

Cantilever

Linear Pull

BOTTLE CAGES

0

1

2

3

EXTRA FRAME OPTIONS *Contact us or visit our [Technology page](#) for more details about our frame options*

T47 threaded BB // \$75

Internal brake routing // \$350

Pressfit30 BB // \$75

3D printed chainstay yoke for max tire clearance and shortest possible chainstay length // \$200

Straight oversized head tube for tapered forks // \$200

Tapered oversized head tube for tapered forks // \$300

Custom frame bag mounts // \$100

Rack mounts

Fender mounts

Pump peg

Integrated light wiring // \$200

Ti travel couplers // \$1300

Belt drive // \$300

Bosch Performance Line pedal assist motor mount // \$800

Complete builds starting at \$8900 (only available on full ti frames sold within the US)

FINISH OPTIONS

Bead-Blasted

Brushed // \$300

Custom

LOGOS

Decals

Brushed/Blasted

Anodized // \$200

Contact us or visit our [Finish Options page](#) for more details about finish options.

PARTS KIT

We offer a full range of parts kits and components to complete your dream bike.

Email kevin@fireflybicycles.com for more details.



CURRENT BIKE INFO

MAKE

MODEL

YEAR

THE FOUR KEY CONTACT POINTS

Please take all measurements in cm

A. SADDLE HEIGHT

Measure from the center of the bottom bracket to the top-center of the saddle.

B. SADDLE SETBACK

This is best measured with a plumb bob (any long string with a weight on it will do). Place the string on the tip of the saddle and drop the weight below the bottom bracket. After it steadies, measure horizontally from the string to the center of the bottom bracket.

C. REACH

Measure from the tip of the saddle to the top-center of the bars.

D. HANDLEBAR DROP

Measure vertically from the top of the saddle to the ground.
Then measure vertically from the top-center of the bars to the ground.
Subtract the second measurement from the first.


OTHER BIKE SPECS

Horizontal TT Length

Stem Length & Angle

Headset Spacers (*in mm*)

Saddle Choice

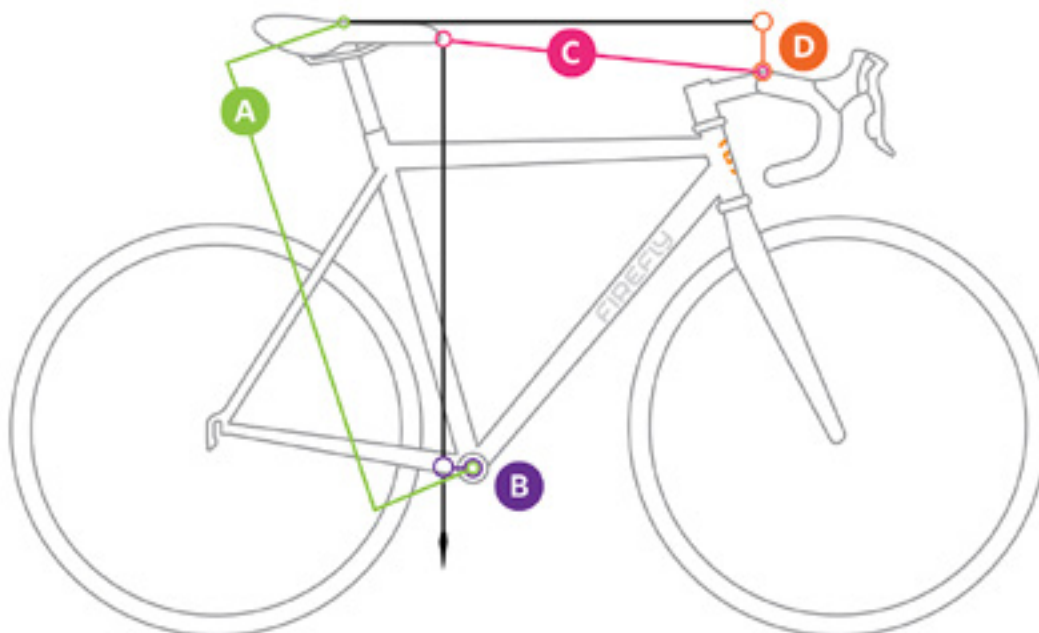



BODY INFO

WEIGHT

AGE

Please take all measurements in cm

A. HEIGHT

B. TOTAL BODY LENGTH

Your sternal notch is the notch at the base of your neck. Stand up straight with your feet at shoulder width. Measure from your sternal notch to the floor.

C. INSEAM

Still standing with your feet shoulder width apart, hold a book between your legs and parallel to the ground. Pull the spine of the book up into your perineum with the pressure of a saddle. Measure from book's spine to the ground. Check this measurement a couple of extra times, it is the most difficult to take accurately.

D. ARM LENGTH

Your acromion process is the outermost bone in your shoulder. Hold onto a pen and hold your arm as straight as possible at a 45° angle. Measure from the acromion process to the pen.

E. SHOULDER WIDTH

Measure from one acromion process to the other.

